

Motor Home Mud Flap Installation

If your mudflap has been shipped already assembled, skip down to step 10.

To assemble the mudflap:

- Step 1: Spread cardboard or blanket on table top to help prevent scratching of the stainless steel weight.
- Step 2: Lay the weight sticker side down onto the table with the studs facing up. Make a point of knowing which is the top of the weight. Round corners towards you.
- Step 3: Place the rubber mudflap on top of the weight, round corners towards you. The holes in the rubber will fit the studs on the weight. If your cut out/drop is off center or you have an exhaust cut out you will need to lay the rubber correctly so that it will be on the correct side when finished.
- Step 4: Place the galvanized backing plate with the bent lip along the bottom edge, facing up. The holes in the galvanized plate will line up with the studs.
- Step 5: Use the 1/4 washers and nylok's to secure the backing plate to the flap and weight.

NOTE: Do not use power tools to tighten these nyloks. Only use hand tools and tighten to 10 inch pounds.


- Step 6: Slide the flat bar under the top lip of the mudflap, line it up with the holes in the rubber.
- Step 7: Place the bolts with a washer thru holes in the bracket, and thru the rubber.
- Step 8: Place the angle iron over the rubber with the bolts coming thru the pre-drilled holes in the bracket. Angle should be flush to the top of the rubber.
- Step 9: Secure the bolts with a washer and nylok nut.

To hang the assembled mudflap on your coach:


- Step 10: Find your attachment points on your coach. If there are no holes available for the eye bolts, you will need to drill 3/8" holes. Attach the eye bolts using a washer on both sides of the frame or hitch, then lock washer and nut.
- Step 11: Attach the quick links/chains to the eye bolts, D-rings will hook to the hanging ears on the flap. See picture on the back.
- Step 12: Measure chain to chain to determine the spread of the hanging points.
- Note: Slight outward angle of the chains will help detour side to side swinging.
- Step 13: Bolt the hanging ears to the pre-drilled holes in the top of the angle iron. The ears should be flush with the top of the rubber to make the flap hang straight.
- Step 14: Lift the mudflap into position and attach the D-rings to the hanging ears.
- Step 15: Check the height of the mudflap off the ground with the coach aired up to ride height. Adjust the supplied chain links as necessary to achieve appropriate height. We suggest the mudflap be approximately 4" above the ground with 2" of clearance between the flap and hitch or frame for swing.
- Step 16: Ensure all mounting hardware is tight. We recommend using locktight on all the hardware.

NOTE: Check all attachment points, and tighten as necessary prior to each trip to avoid detachment of your mud flap. If you encounter a road hazard and can not avoid rolling over it with your coach, check to make sure the impact has not torn your mud flap loose.


IF YOU HAVE ANY QUESTIONS OR CONCERNS PLEASE GIVE US A CALL AT 541-245-9148

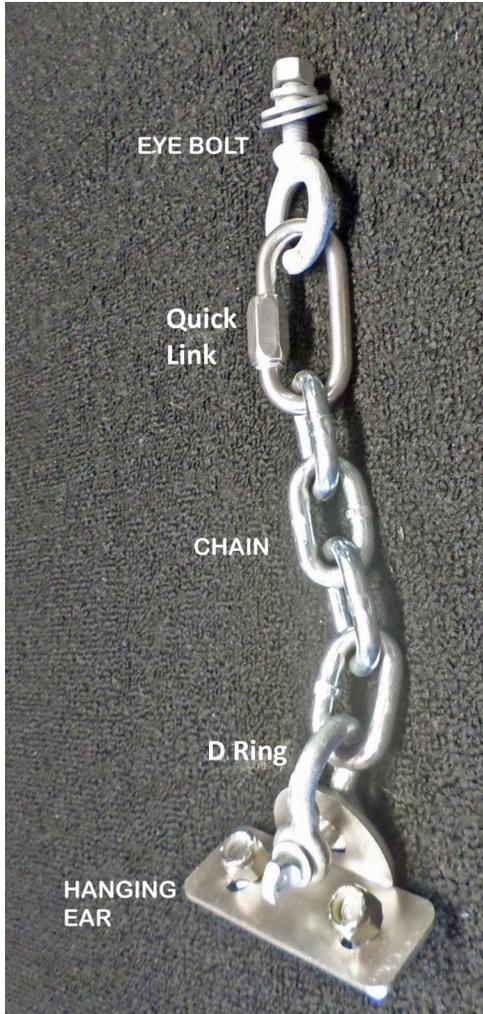

Standard hardware configuration.
Chain may be lengthened or shortened to desired length.

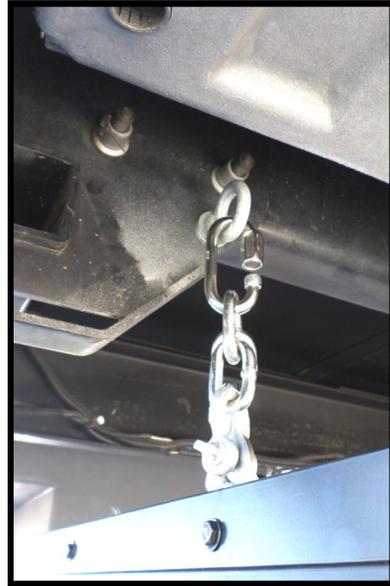

Quick link with collar screwing downward.

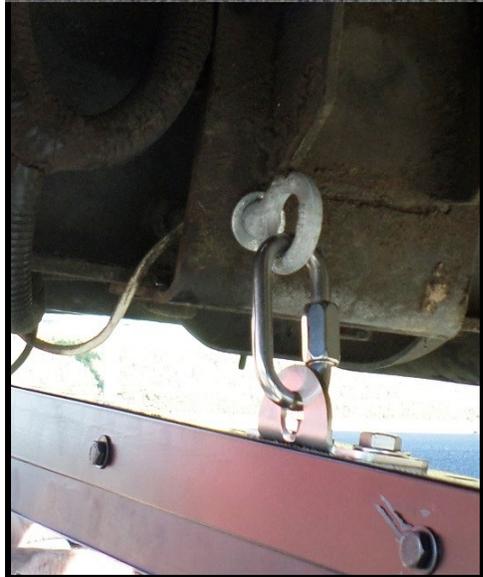

This image shows a revised hanging configuration that may be used if needed to shorten the hanging length of the mud flap. Please note that this configuration does not leave as much swing capability if a road hazard is encountered, and when lowering your coach for parking.

